


# Foreman | TS66200A Universal Lathe

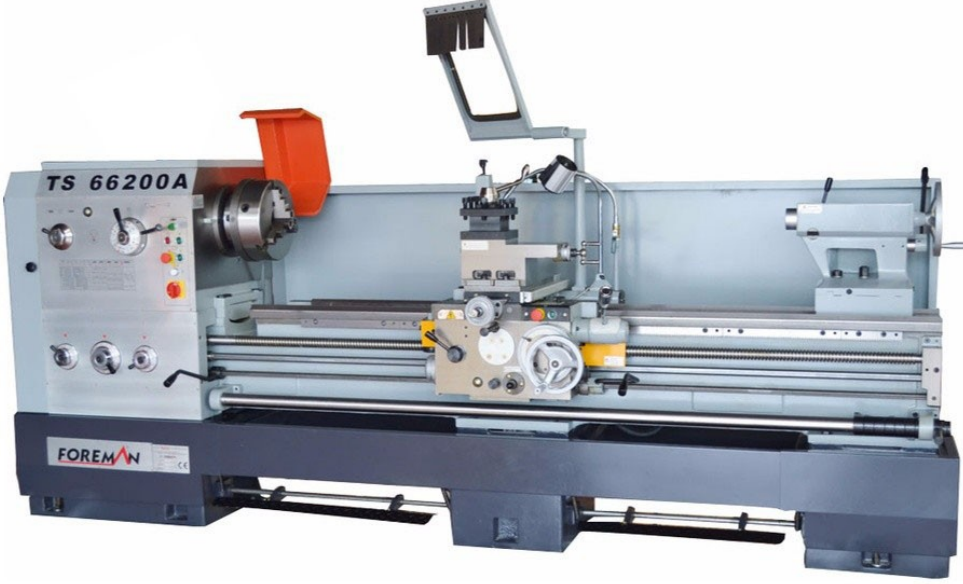

## Ürün Özellikleri

### Standard Options

- X and Z Axis DRO Screen
- X Axis DRO Scale
- Professional Thread Gearbox
- Mechanical Clutch in Gearbox
- Rigid Casting Body
- Steady Rest
- Follow Rest

### Standard Accessories

- 3 Jaw Chuck
- 4 Jaw Chuck
- Face Plate
- Coolant System
- Work Light
- Center Sleeve
- Dead Center
- Leveling Bolts and Legs
- Toolbox

# TS66200A Universal Lathe

## *Teknik Özellikler*

- **Swing Over Bed** *mm* 660
- **Swing Over Cross Slide** *mm* 420
- **Swing in Gap** *mm* 870
- **Width of Bed** *mm* 390
- **Maximum Length of Workpiece** *mm* 2000
- **Spindle Bore** *mm* 105
- **Spindle Conical** *metrik* 113
- **Spindle Speed Steps** *adet* 12
- **Spindle Speed Range** *dev/dk* 36-1600
- **Main Motor** *kW* 7,5
- **Longitudinal Feed Range** *mm/dev* 0.063-2.52
- **Cross Feeds Range** *mm/dev* 0.027-1.07
- **Metric Threads** *mm* 1-14
- **Imperial Threads** *TPI* 28-2
- **Module Threads** *Modül* 0.5-7
- **Diametrical Threads** *DP* 56-4
- **Maximum Travel of Cross Slide** *mm* 310
- **Maximum Travel of Compound Rest** *mm* 145
- **Diameter of Tailstock Sleeve** *mm* 75
- **Morse Taper of Tailstock Sleeve** MT5
- **Travel of Tailstock Sleeve** *mm* 150
- **Weight** *kg* 2800
- **Machine Size** *cm* 380x115x188