


Foreman | TS66300A Universal Lathe

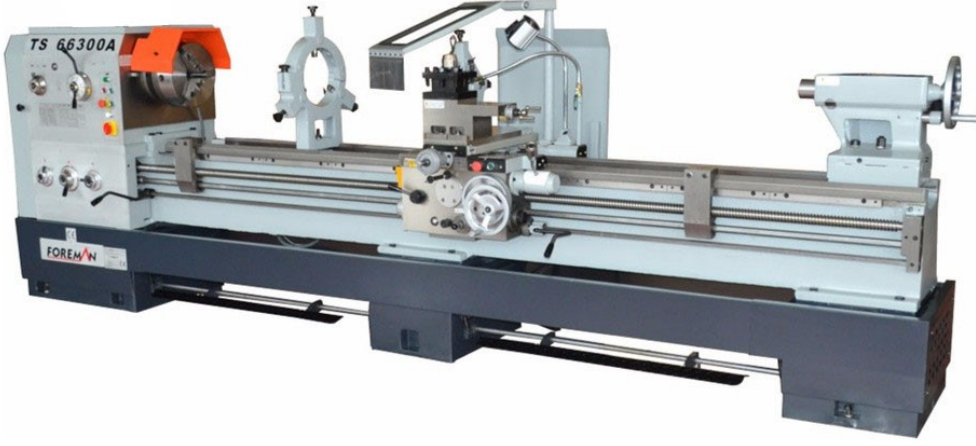

Ürün Özellikleri

Standard Equipment

- Full Norton Transmission
- Clutch Transmission
- Cast Body
- Animated Lunet
- Fixed Lunet

Standard Accessories

- 3 Leg Mirror
- 4-Legged Mirror (With Shutter)
- Plate Mirror
- Cooling Water Equipment
- Lighting Lamp
- hive
- Fixed Tailstock
- Leveling Plates and Bolts
- Toolbox

TS66300A Universal Lathe

Teknik Özellikler

- **Swing Over Bed** *mm* 660
- **Swing Over Cross Slide** *mm* 420
- **Swing in Gap** *mm* 870
- **Width of Bed** *mm* 390
- **Maximum Length of Workpiece** *mm* 3000
- **Spindle Bore** *mm* 105
- **Spindle Conical** *metrik* 113
- **Spindle Speed Steps** *adet* 12
- **Spindle Speed Range** *dev/dk* 36-1600
- **Main Motor** *kW* 7,5
- **Longitudinal Feed Range** *mm/dev* 0.063-2.52
- **Cross Feeds Range** *mm/dev* 0.027-1.07
- **Metric Threads** *mm* 1-14
- **Imperial Threads** *TPI* 28-2
- **Module Threads** *Modül* 0.5-7
- **Diametrical Threads** *DP* 56-4
- **Maximum Travel of Cross Slide** *mm* 310
- **Maximum Travel of Compound Rest** *mm* 145
- **Diameter of Tailstock Sleeve** *mm* 75
- **Morse Taper of Tailstock Sleeve** MT5
- **Travel of Tailstock Sleeve** *mm* 150
- **Weight** *kg* 3000